

# BACSOFT B-CONNECT 2G SMART COMMUNICATIONS CONTROLLER


## M2M CONNECTIVITY FOR LEGACY 2.5G GPRS

### BACSOFT IOT PLATFORM

The Bacsoft platform is an end-to-end solution for building and managing advanced IoT and M2M applications. Using Bacsoft, companies can rapidly connect their legacy infrastructure to the Industrial Internet and build applications to remotely monitor and control their operations.



Bacsoft reduces the complexity of IoT projects with a combination of robust and reliable remote connectivity, simple and rapid application development, and scalable cloud services. The platform features:

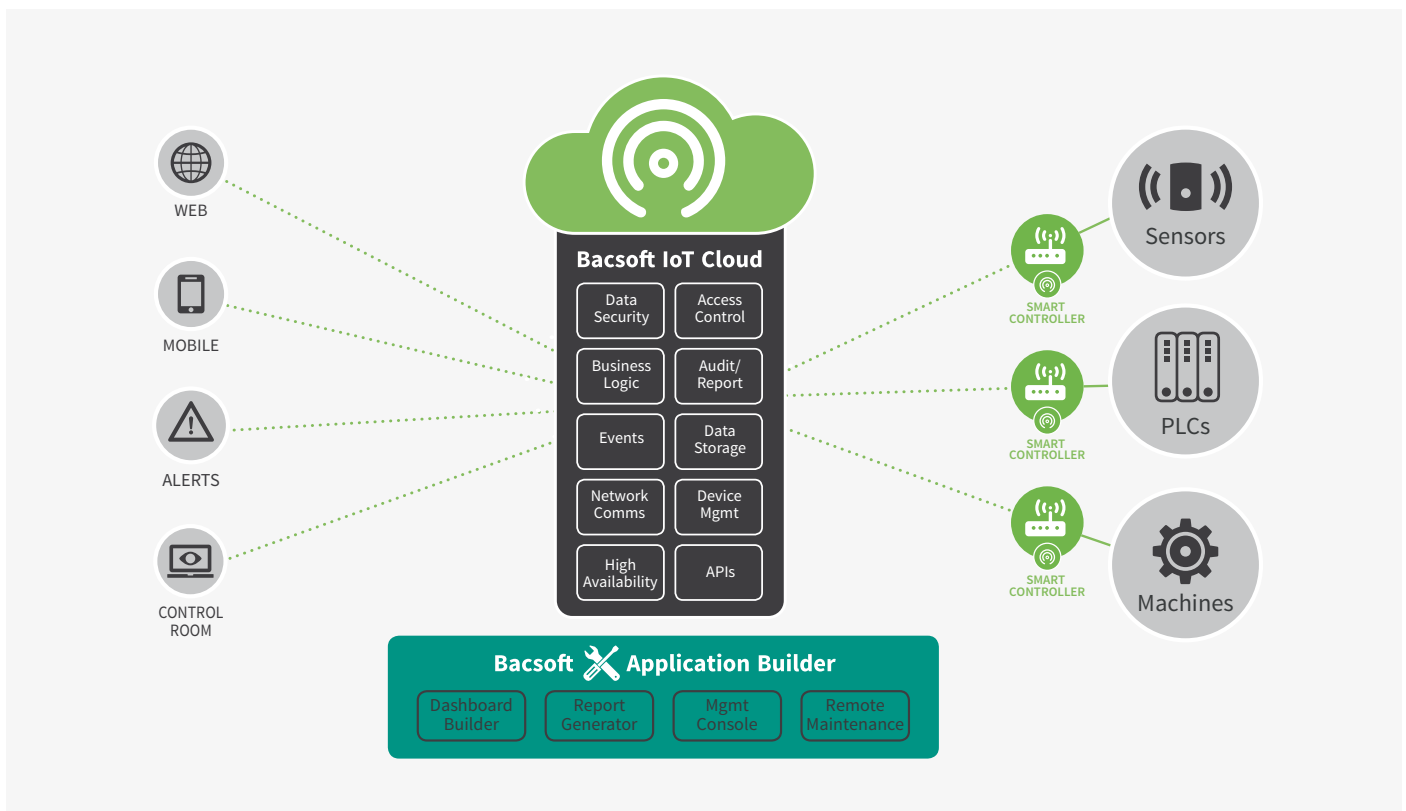

#### M2M COMMUNICATIONS:

Bacsoft 2G Smart Communications Controller offers built-in support for a wide variety of devices, interfaces and protocols. Designed to operate reliably under all kinds of conditions, the 2G Smart Communications Controller is cost-effective and easy to deploy.

#### IOT CLOUD:

The Bacsoft IoT Cloud handles all aspects of communications, application execution, data storage, security and auditing. It easily scales to support thousands of connected devices.

#### APPLICATION BUILDER:

Rapid development tools enable integrators and IT organizations to easily build tailored IoT applications without coding and deploy them for mobile, web and control rooms.

# BACSOFT B-CONNECT 2G SMART COMMUNICATIONS CONTROLLER: GPRS 2.5 G CONNECTIVITY FOR LEGACY NETWORKS

The Bacsoft B-Connect 2G Smart Communications Controller provides bi-directional cellular communications over 2.5G networks. Through extensive experience with networks around the world, Bacsoft has developed technology to ensure reliable M2M communications under all conditions. Each device manages the connectivity to the server and can adapt to field conditions by initiating communications, performing self-recovery and more.

A hardware-based external watchdog ensures that the communications software is running properly at all times, and, in case of an error, reboots the controller.

Bacsoft secures M2M communications with optional SSL 3.0 encryption, along with the option to install private, self-signed certificates. To further increase security and eliminate the need for a fixed IP address, the controller identifies and verifies the server during each connection.

The B-Connect 2G Smart Communications Controller can be used to manage virtually any device. It includes built-in support for Modbus and Melsec and is easily adapted to work with any proprietary protocol, binary or ASCII. Where appropriate, one controller can manage a series of devices through a serial RS485 interface, simplifying deployment and eliminating multiple SIM cards.

## FEATURES



Plug & Play Connectivity (easy setup, all wireless)

Always On - refresh rate of data read and data write is around 2 seconds both ways

Includes external hardware watchdog for fail-safe operation

Very Low Data Usage (a few megabytes per whole month 24/7 connectivity)

Various Analog and Digital Interfaces:

- 2 Analog Input 0-10V/4-20mA
- 1 Analog Output 0-10V/4-20mA
- 2 Relay Outputs
- 8 Digital Inputs
- 1 Hardware Counter

2 \* RS232 + 1 RS485

Offline Logging Capabilities

Debug and setup using standard SMS messages

OTAP (Over the Air Provisioning) support for software updates

Optional SSL Version 3 with embedded server certificate for secure applications

Option to open a raw tunnel directly to remote equipment

## APPLICATIONS

### INDUSTRY APPLICATIONS



Multi PLC Control  
All Types of Sensors Readings (Analog/Digital/ASCII/Binary)

### ENVIRONMENTAL APPLICATIONS



Temperature, Humidity, CO2 (etc) Monitoring  
Forest Fire Detection  
Meteorology Station and Monitoring  
Early Earthquake Detection  
Snow Level Monitoring  
Air Pollution  
More

### SMART CITY APPLICATIONS



Parking Control  
Smart Lighting  
Traffic Control  
Waste Control  
More

### METERING APPLICATIONS



Tank Level (Oil/Gas/Fuel)  
Silos Material Measurement  
Electric/Water Meter Reading

### WATER APPLICATIONS



Remote Control of Valves  
Leak Detection  
Valve Control  
Water Meters (Pulses, Binary, ASCII)  
Water Leakage  
River Height and Flood Alerting  
Swimming Pool Monitoring

### AGRICULTURE APPLICATIONS



Green Houses  
All Type of Irrigations Controllers  
Low-Energy Sensors (Tensitometers etc)  
Hen House / Cowshed Control

### SECURITY APPLICATIONS



Transformer Theft Alarm  
All Types of Security Sensors (Entry, Step-on etc)  
Access Control

## GSM SPECIFICATIONS

Bands	GSM 850/900/1800/1900 MHz
Data Class	GPRS multi-slot class 12

## SYSTEM SPECIFICATIONS

### POWER REQUIREMENTS

Supply Voltage Range	8-30 VDC
Protected Over Voltage	2-60 VDC

### CURRENT CONSUMPTION

GSM/GPRS Mode	170 mA (Avg) at 12 VDC
Maximum momentary	250 mA (Avg) at 12 VDC

### MEMORY CHARACTERISTICS

Type	Read Write
Max Storage Capacity	Up to 30000 Measurements (in offline mode)

### ENVIRONMENTS

Operating Temperature	-20°C to 70°C
Automatic Turn Off	80°C
Storage Temperature	-35°C + 75°C
Operating Humidity	5% to 95%

### DIMENSIONS/WEIGHT


Dimensions	105x86x58.5
Weight	200 g

### STANDARDS

Standards	TUV, CE
-----------	---------

### WIRELESS MODULE

Cinterion TC65i

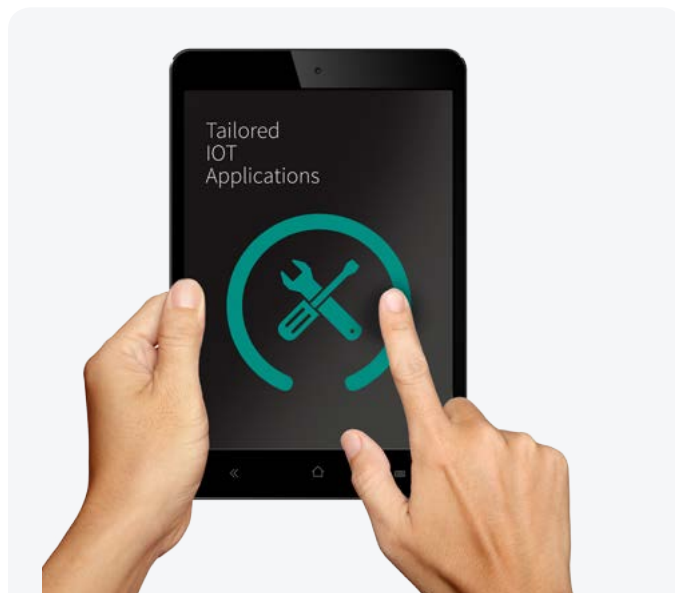

## INTERFACES

2 Analog Inputs	0-10V/4-20mA - 12 bit
1 Analog Output	0-10V/4-20mA - 12 bit
2 Digital Output	Relay output
8 Digital Input (1 Hardware Counter)	Dry contact
1 Serial RS-232/485 port (Can be configured as RS-485)	Full Duplex DB9 Female/ 2 Wire 485
1 RS-232 port	RX/TX/GND
Reset Button	
SIM card socket	Push type
Antenna connector	Regular/full size SMA Male
Plug in Power Supply	Terminal Block
Plug in Backup Battery /Auxiliary Input	Terminal Block
LED Indications	Signal Strength (3 bars) / Serial Ports / Network

## ADVANCED TECHNICAL INFORMATION

### DIGITAL INPUT CHANNEL SPECIFICATION

Input Range - On	3 - 30V ("1")
Input Range - Off	0 - 1V ("0")
Input Resistance	280Kohm
Over Voltage Protection	70V

Digital Input #8 can be configured to act as digital counter for use with sensors that generate pulses

### DIGITAL OUTPUT CHANNEL SPECIFICATION

Type	Relay - Dry Contact
Switching Power	60W (DC) 62.5VA (AC), 2A / 30Vdc, 0.5A / 125V ac

### ANALOG INPUT CHANNEL SPECIFICATION

Current Mode-Input Range	4..20ma
Current Mode-Load	56.2Ω
Current Mode-Resolution	12bit
Voltage Mode 0-10V-Input Range	0-10V
Voltage Mode 0-10V-Resistance	110KΩ
Voltage Mode 0-10V-Resolution	12bit

### ANALOG OUTPUT CHANNEL SPECIFICATION

Current Mode-Input Range	4..20ma
Current Mode-Resolution	12bit
Voltage Mode 0-10V-Input Range	0-10V
Voltage Mode 0-10V-Resolution	12bit